




TRANSVERSE SECTION FOR CONCRETE PAVEMENT

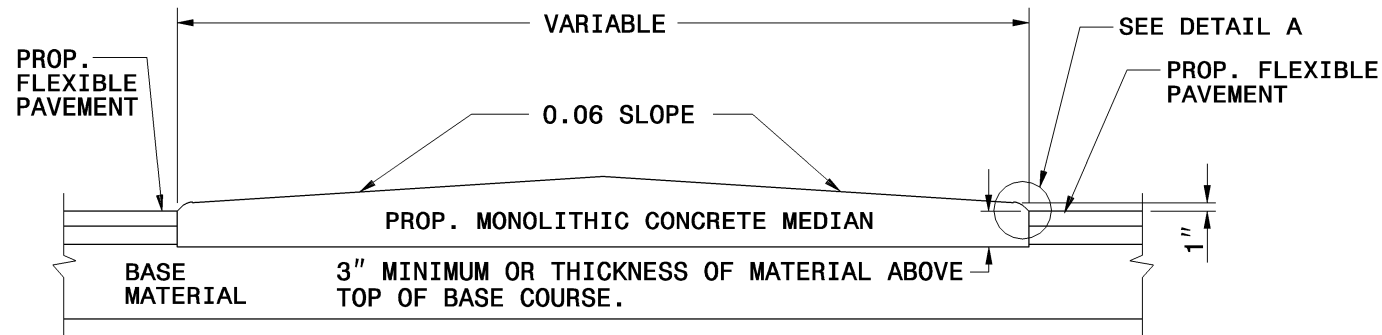


TRANSVERSE SECTION FOR FLEXIBLE PAVEMENT

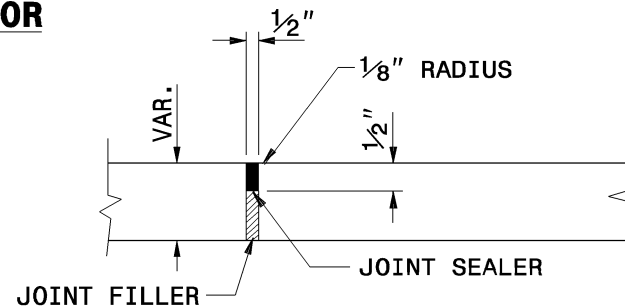

SHOWING EXPANSION JOINT

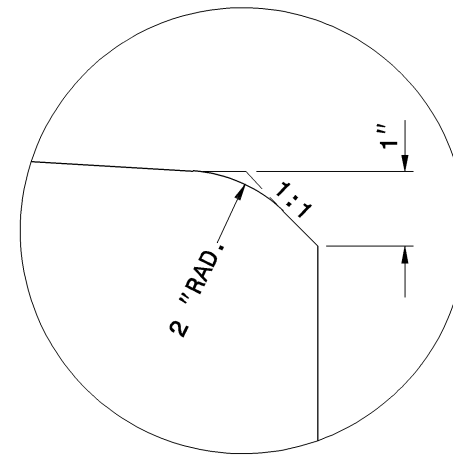

DETAIL - A

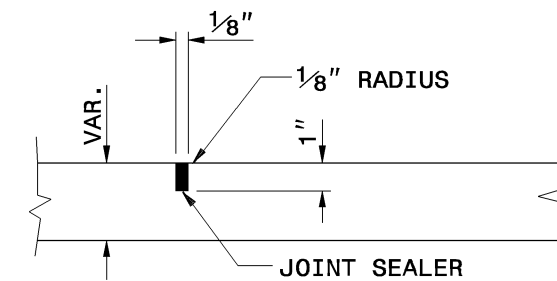

SHOWING GROOVED JOINT

PART LONGITUDINAL SECTIONS OF CONCRETE MEDIAN

GENERAL NOTES:

PLACE 1/2" EXPANSION JOINTS AT 30' INTERVALS AND AT ALL OTHER POINTS WHERE PROPOSED MEDIAN ABUTS RIGID OBJECTS. PLACE GROOVED JOINTS 1/2" DEEP AT 10' INTERVALS BETWEEN EXPANSION JOINTS. FILL THE TOP 1/2" OF EXPANSION JOINTS AND 1/2" GROOVED JOINTS WITH JOINT SEALER.